


ECO 33 SPINDLE SYSTEMS





Motor Variant 33-05

Motor type	asynchron
Number of pol's	2
Speed range (rpm)	60.000
Power output S1/S6 40% (kW)	0,16 / 0,26
Torque S1/S6 40% (Nm)	0,03 / 0,04
Frequency range (Hz)	1000
Max. voltage (Volt)	35
Nominal current S1/S6 40% (Amp.)	5 / 7




THE FASCINATION OF
POWER & ROTATION

CONFIGURE YOUR SPINDLE NOW!
www.imt.de/konfigurator

IMT ECO 33

- With our ECO 33 series we present a precise solution of individual goals. Here too the characteristic IMT system modularity was continued consistently. It combines the very latest technology with a unique compact design. With its multiple options it adapts perfectly to any machinery. The spindles are equipped with quad hybrid-ceramic-bearings as an IMT standard. You decide on the spindle features and control the costs.
- The materials used for production are selected to be resource-saving and environmentally friendly. This includes parts subject to wear, since the life of a spindle can last a long time.
- With the purchase of IMT spindles you can rely on innovative technology as well as perfect customer service.
- Show your colours and decide on the IMT ECO 33

Eco 33 Axx

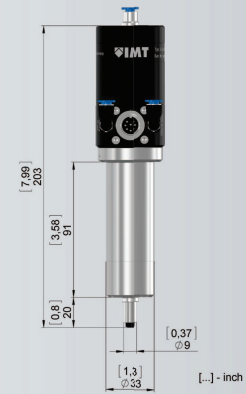

Eco 33 Mxx

